

# Hydraulic Cable Grab 8t HCG2 and HCG4

[www.pharosoffshoregroup.com](http://www.pharosoffshoregroup.com)



**PHAROS**

OFFSHORE GROUP

As standard the hydraulic cable grab is fitted with a certified lift point suitable for recovery and deployment, this is to be attached to a suitable crane or winch wire. The grab is supplied hydraulic pressure from surface and actuated by means of the integral hydraulic cylinder. The grab mechanism layout allows for a load of 8Te to be successfully lifted.

### SPECIFICATION


Gripping Area	0.42 sqm
Weight	366 kg
Max Working Pressure	300bar
Max Operational Depth	75m
Lifting Capacity (vertical)	8,000 kg

### SUPPLIED WITH

- 2 x 200m ½ BSP hydraulic hoses
- Deck Hydraulic Power Unit (HPU)
- Spare Environmentally friendly oil (205ltr)
- Cylinder Seal Kit
- Check Valve & Piping
- Spare Hose

### OPTIONAL

- Camera/ light system incorporating - Topside monitor and control unit, umbilical
- Imaging sonar system incorporating - Topside monitor and control unit, umbilical

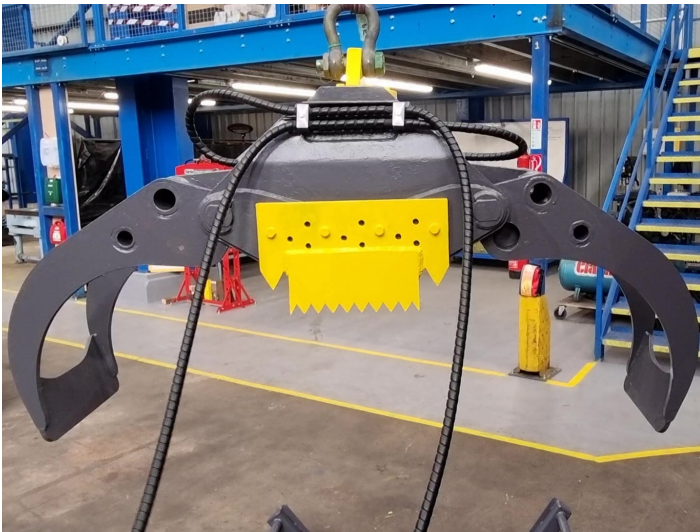

### Get In Touch

info@pharos-offshore.com  
+44 (0) 1670 281980

Wimbourne Quay, Port of Blyth  
NE24 1PX

www.pharosoffshoregroup.com