


Hydraulic Rock Grab

www.pharosoffshoregroup.com

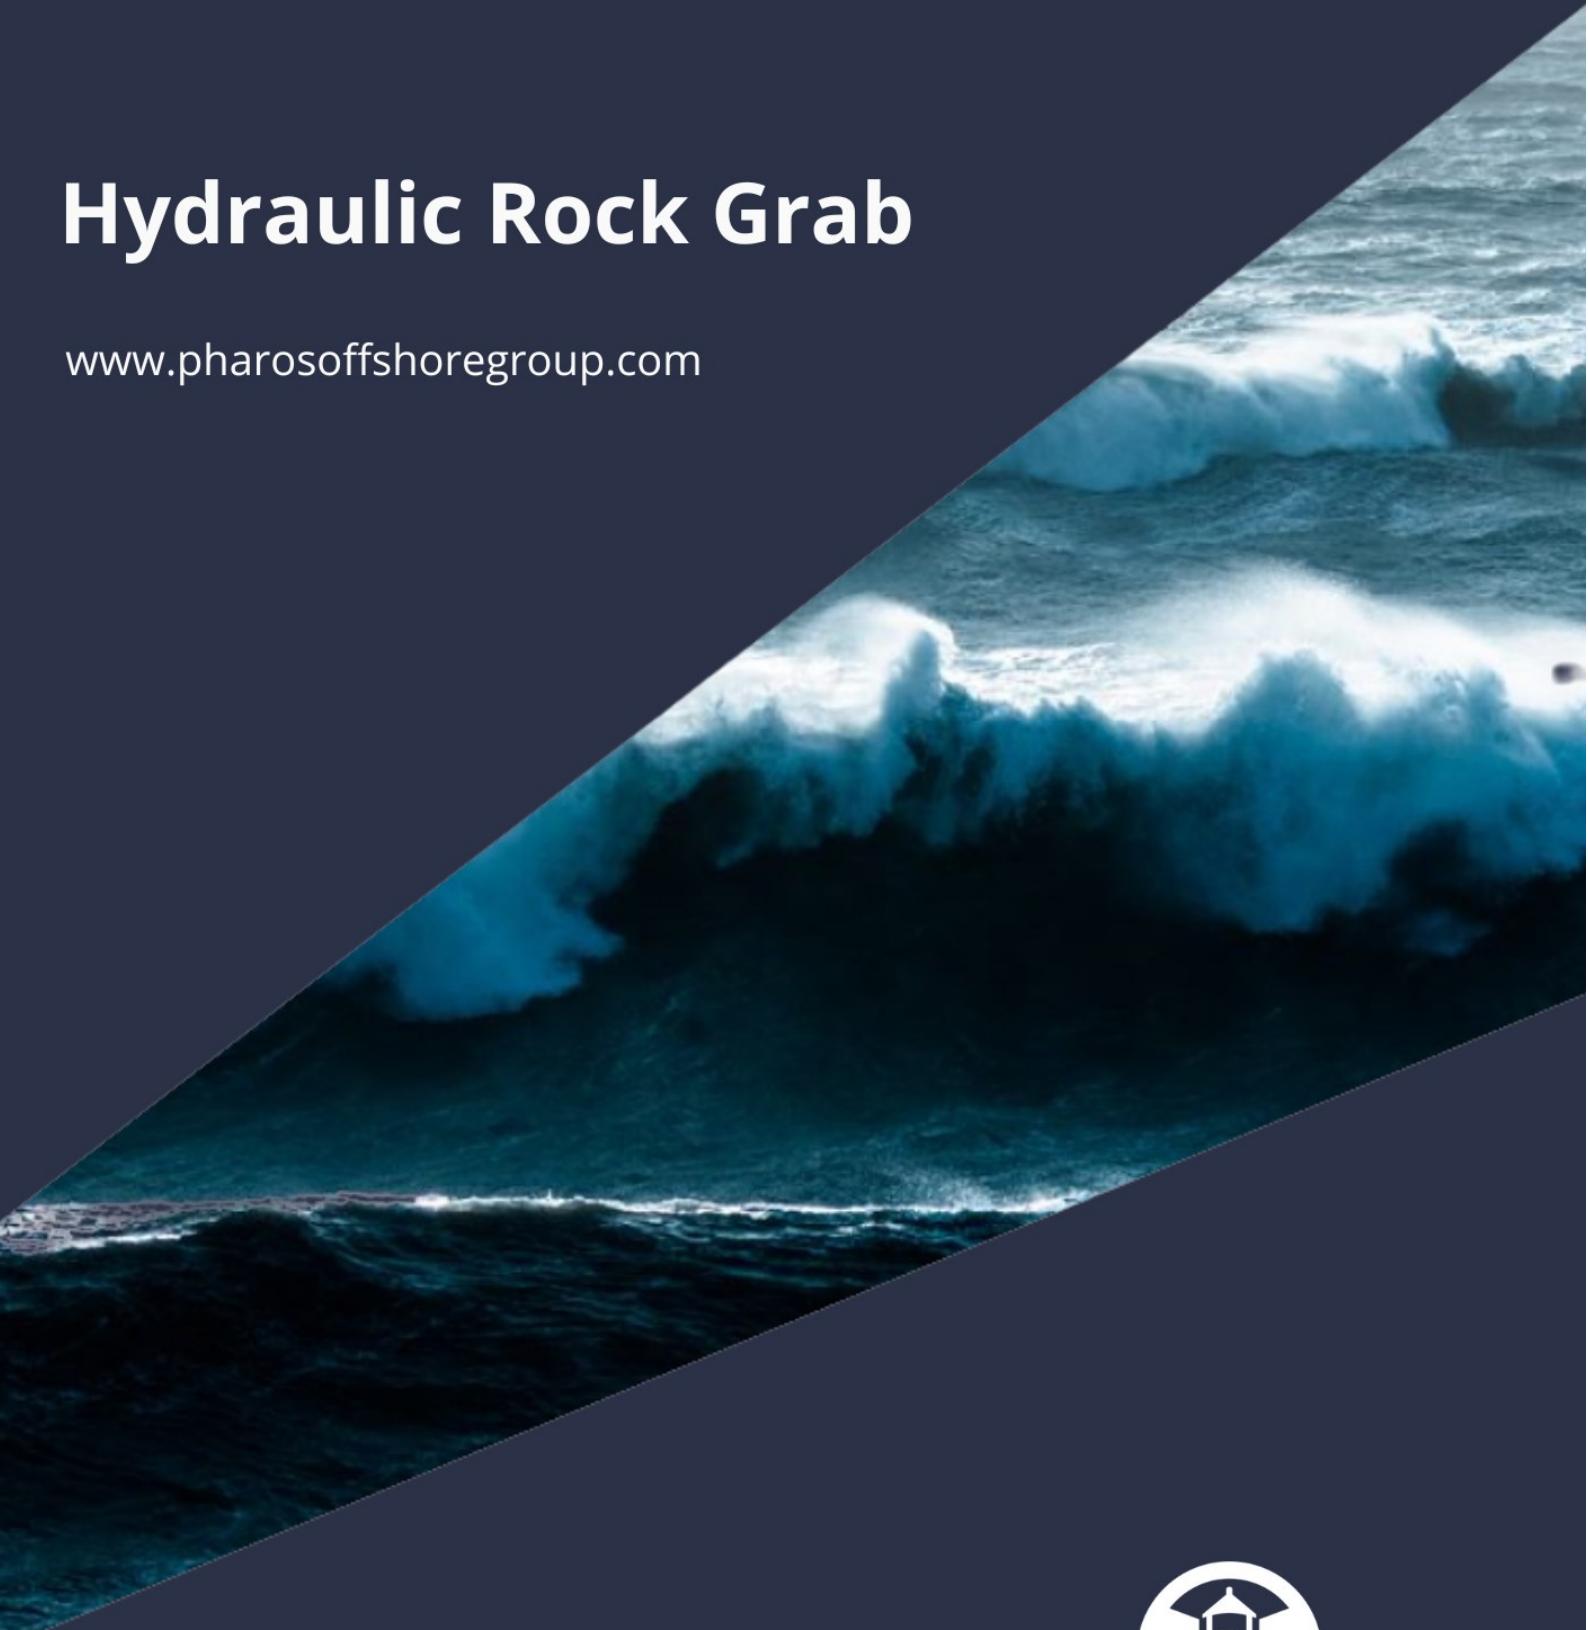

PHAROS
OFFSHORE GROUP

Industry standard hydraulic five tine rock grab can be utilised with an ROV for assistance or with ancillary sensors for independent operation. The grab can be coupled with an ROV hot stab for deep water applications.

SPECIFICATION		OPTIONAL
Height	3.0m	ROV control – hot stab facility for ROV intervention
Tine width open	2.5m	Surface control – dual ½" BSP hoses, 100/ 200m length c/w HPU & directional control valve
Tine height open	0.6m	Hose storage – hydraulic hose spool c/w HPU & directional control valve
Weight	3200kg	Visual monitoring – camera/ lamp/ umbilical & display monitor c/w umbilical reel
Working pressure	270 bar	Sonar monitoring – single/ dual imaging sonar(s) c/w & display PC
Lift capacity	8t in air	Position monitoring – FO Gyro c/w umbilical & display PC
Operational depth	180m	



Get In Touch

info@pharos-offshore.com
+44 (0) 1670 281980

Wimbourne Quay, Port of Blyth
NE24 1PX

www.pharosoffshoregroup.com